

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 065 368 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
03.01.2001 Bulletin 2001/01

(51) Int. Cl.<sup>7</sup>: F02M 57/02

(21) Application number: 00305414.5

(22) Date of filing: 28.06.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Lambert, Malcolm David Dick  
Bromley, Kent BR2 9LN (GB)  
• Buckley, Paul  
Gillingham, Kent ME8 9ES (GB)


(30) Priority: 30.06.1999 GB 9915118

(71) Applicant:  
Delphi Technologies, Inc.  
Troy, MI 48007 (US)

(74) Representative:  
Pople, Joanne Selina  
Marks & Clerk,  
Alpha Tower,  
Suffolk Street  
Queensway, Birmingham B1 1TT (GB)

(54) Fuel injector

(57) A fuel injector has a valve needle (12) slidable within a bore (11) formed in a nozzle (10). The valve needle (12) is engageable with a seating to control delivery of fuel from the bore (11). The injector also includes a supply passage (37) for supplying fuel under high pressure to the bore (11). A surface of a piston (18) adapted to engage with the needle (12) is exposed to the fuel pressure within a control chamber (39) which communicates continuously through an inlet passage (38) with the supply passage (37). The control chamber (39) further communicates, through an outlet passage (40), with an injection control valve (21-25) arranged to control communication between the control chamber (39) and a drain port. The inlet and outlet passages (38 and 40) are shaped to restrict the rate at which fuel can flow to and from the control chamber (39).

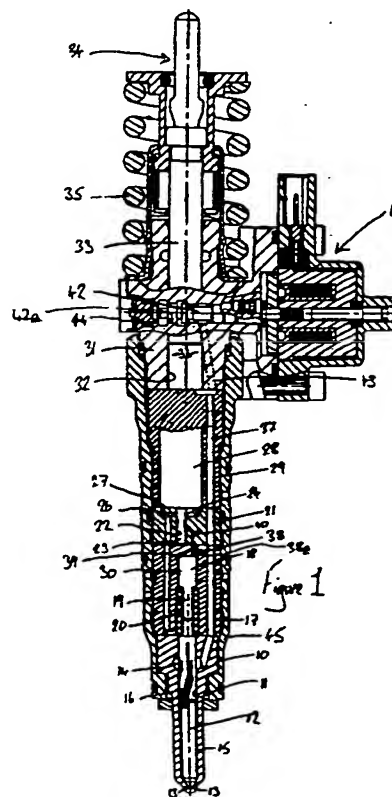

BEST AVAILABLE COPY

## Description

[0001] This invention relates to a fuel injector for use in delivering fuel under high pressure to a combustion space of an associated engine. The invention relates, in particular, to a fuel injector of the type including a pump, the pump supplying fuel exclusively to the injection nozzle of the injector, and not to the nozzles of other injectors associated with the engine. The pump typically forms part of the injector, being rigidly mounted upon or secured to the injection nozzle, but arrangements are also possible in which the pump is spaced from the injection nozzle, a high pressure fuel line connecting the pump chamber of the pump to the nozzle of the injector.

[0002] In known pump injectors, for example as shown in EP 0840003, the timing of fuel injection is controlled independently of the timing of commencement of fuel pressurisation by the pump by controlling the fuel pressure within a control chamber, a surface associated with the needle of the injection nozzle being exposed to the fuel pressure within the control chamber. By appropriate control of the fuel pressure within the control chamber, the magnitude of a force urging the valve needle towards its seating can be controlled. The control of the control chamber pressure is achieved using an electromagnetically actuatable three way valve operable to permit communication between the control chamber and either a supply passage containing fuel under pressure or a drain passage which communicates, in use, with a relatively low pressure fuel reservoir.

[0003] It is an object of the invention to provide a fuel injector in which the degree of control over injection is improved.

[0004] According to the present invention there is provided a fuel injector comprising a valve needle slidable within a bore formed in a nozzle and engageable with a seating to control delivery of fuel from the bore, and a supply passage for supplying fuel under high pressure to the bore, the needle having associated therewith a surface exposed to the fuel pressure within a control chamber, the control chamber communicating, continuously, through an inlet passage with the supply passage, the control chamber further communicating, through an outlet passage, with an injection control valve arranged to control communication between the control chamber and a drain port, wherein the inlet and outlet passages are shaped to restrict the rate at which fuel can flow to and from the control chamber.

[0005] Preferably, a fuel delivery chamber connected with the supply passage is provided in the nozzle, the needle has at least one thrust surface exposed to pressure in the fuel delivery chamber and arranged, in use, to urge the needle away from the seating, and the surface exposed to fuel pressure within the control chamber is arranged to act on the needle in a direction tending to urge the needle towards the seating.

[0006] Preferably also, the surface exposed to fuel

pressure within the control chamber has a greater effective area than the effective area of said at least one thrust surface of the needle.

[0007] The surface exposed to pressure within the control chamber is conveniently defined by a surface of a piston engageable with the needle.

[0008] The injection control valve may be an electromagnetically actuatable valve or a piezoelectrically actuatable valve.

[0009] The injector may further comprise a pressurisation control valve for controlling communication between a pumping chamber of a fuel pump associated with the injector and a low pressure feed port.

[0010] Conveniently, the pressurisation control valve is arranged as a spill valve to allow fuel from the pumping chamber to be pumped back to the feed port when fuel delivery from the nozzle is not required.

[0011] The pump may be rigidly mounted upon the nozzle. Alternatively, the pump and nozzle may be spaced apart from one another, the supply passage being defined, at least in part, by a high pressure pipe.

[0012] The invention will further be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a sectional view illustrating a fuel injector in accordance with an embodiment of the invention; and

Figure 2 is an enlargement of part of Figure 1.

[0013] The fuel injector illustrated in the accompanying drawings takes the form of a unit pump/injector and comprises a nozzle body 10 having a blind bore 11 formed therein within which a needle 12 is slidable. The needle 12 is engageable with a seating defined adjacent the blind end of the bore 11 to control fuel flow past the seating from the bore 11 to a plurality of outlet openings 13 located downstream of the seating.

[0014] The needle 12 includes an upper region of diameter substantially equal to the diameter of the adjacent part of the bore 11, the cooperation between these parts of the needle 12 and the bore 11 guiding the needle 12 for sliding movement within the bore 11. This part of the bore 11 includes a region of enlarged diameter defining an annular gallery 14. Fuel from the annular gallery 14 is able to flow to a delivery chamber 15 defined between the needle 12 and the bore 11 adjacent the seating through flutes 16 formed in the needle 12.

[0015] The nozzle body 10 abuts a piston housing 17 provided with a blind bore of stepped form, a piston 18 being slidable within the bore adjacent the blind end thereof. The piston 18 includes a projection 19 which is engageable with a projection extending from the upper end of the needle 12, in the orientation illustrated. The bore further houses a spring 20 which is seated against a step of the bore and which abuts a spring abutment

member 20a located between the spring 20 and the needle 12. The spring 20 therefore applies, via the spring abutment member 20a, a relatively small force to the needle 12 to urge the needle 12 towards the seating.

**[0016]** The piston housing 17 abuts a valve housing 21 provided with a through bore 22 within which a valve member 23 is slidable. The valve member 23 includes a region 24 of relatively large diameter which is engageable with a seating defined adjacent an end of the bore 22 to control communication between an annular chamber 25 defined between the valve member 23 and the bore 22 and an armature chamber 26 defined by a recess formed in an end face of the valve housing 21. The armature chamber 26 houses an armature 27 moveable under the control of an electromagnetic actuator 28 located within an actuator housing 29 to move the valve member 23 between a position in which it engages its seating and a position in which it is lifted from its seating. The actuator 28 includes a spring arranged to urge the valve member 23 into engagement with its seating when the actuator is not energised.

**[0017]** The valve housing 21 and piston housing 17 are provided with drillings forming a passage 30 whereby the bore containing the spring 20 and the lower end of the bore 22 are connected to the armature chamber 26. The armature chamber 26 is connected through a passage (not shown) with a backleak or drain port of the injector which communicates, in use, with a relatively low pressure fuel reservoir (not shown). As a result, the needle 12, piston 18 and valve member 23 are free to move without becoming hydraulically locked.

**[0018]** The actuator housing 29 abuts a pump body 31 provided with a bore 32 within which a pump plunger 33 is reciprocable under the action of a cam and tappet arrangement 34 against a return spring 35. The bore 32 and plunger 33 together define a pumping chamber 36 which communicates through a supply passage 37 formed by drillings provided in the actuator housing, the valve housing, and piston housing and the nozzle body with the annular gallery 14. The supply passage 37 communicates through an inlet passage 38 with a control chamber 39 defined between the piston 18 and the blind end of the bore within which the piston 18 is slidable. The inlet passage 38 is defined, in part, by a drilling 38a of small diameter. It will be appreciated, therefore, that the control chamber 39 is in constant communication with the supply passage 37, and that the rate at which fuel is able to flow to the control chamber 39 is restricted. An outlet passage 40 including a drilling 40a of small diameter provides a constant, restricted flow path between the control chamber 39 and the annular chamber 25.

**[0019]** An electromagnetically actuatable spill valve 41 is mounted upon the pump body 31. The spill valve 41 includes a valve member 42 which extends transversely to the axis of the needle 12 through a bore 42a. A plug member 44 closes the bore 42a at the end of the

valve needle 42 remote from the spill valve 41. The valve member 42 is engageable with a seating to control communication between the pump chamber 36 and a feed port (not shown) by means of a passage 43. The feed port communicates, in use, with the relatively low pressure fuel reservoir. A cap nut is used, in the conventional manner, to secure the various parts of the injector to one another.

**[0020]** In use, with the feed port communicating through appropriate passages with the relatively low pressure fuel reservoir, with the actuators of both valves deenergised, and with the plunger 33 at its innermost position, movement of the cam and tappet arrangement allows the plunger 33 to move under the action of the return spring 35 to draw fuel past the spill valve member 42 into the pumping chamber 36. The movement of the plunger 33 therefore charges the pumping chamber 36 with fuel at a relatively low pressure. During this phase in the operation of the injector, the fuel pressure within the delivery chamber 15 acting upon angled thrust surfaces of the needle 12 is low and fuel pressure within the control chamber 39 is sufficient to hold the projection 19 of the piston 18 in engagement with the needle 12. The net effect of the forces applied by the fuel pressure and the action of the spring 20 results in the needle 12 being held against its seating thus fuel injection does not take place. The force applied by the spring 20 is, as mentioned hereinbefore, relatively low but is sufficient to hold the needle 12 in engagement with its seating against cylinder pressure, in use.

**[0021]** Once the plunger 33 reaches its outermost position, inward movement of the plunger commences. Provided the spill valve 41 is still deenergised, the valve member 42 thereof remains spaced from its seating, thus fuel is able to flow from the pumping chamber 36 back through the feed port to the fuel reservoir. As fuel is displaced by the movement of the plunger 33 to the low pressure reservoir, it will be appreciated that the needle 12 does not move and injection of fuel does not commence.

**[0022]** In order to commence pressurisation of fuel, the spill valve 41 is energised, moving the spill valve member 42 into engagement with its seating, preventing further fuel from being displaced to the low pressure reservoir. As fuel is no longer displaced in the aforesaid manner, continued inward movement of the plunger 33 pressurises the fuel within the pumping chamber 36 and bores in communication therewith. The increase in the fuel pressure occurs both in the delivery chamber 15 and in the control chamber 39, urging the piston 18 into engagement with the needle 12, and as the effective area of the surface of the piston 18 exposed to the fuel pressure within the control chamber 39 is greater than that of the needle 12 exposed to the fuel pressure within the delivery chamber 15, the needle 12 is held in engagement with its seating by the fuel under pressure.

**[0023]** The timing at which the spill valve is closed is chosen such that a desired fuel pressure is achieved

within the delivery chamber 15 at the instant at which fuel injection is to commence. In order to commence injection, the valve member 23 is lifted from its seating by energising the actuator 28. Such movement allows fuel to escape from the control chamber 39, relieving the fuel pressure therein. The values of the restrictions to fuel flow defined by the inlet and outlet passages 38, 40 are chosen to ensure that the fuel pressure within the control chamber 39 falls at a desired rate. The reduction in fuel pressure reduces the magnitude of the force applied to the needle 12 by the piston 18, and a point will be reached beyond which the needle 12 is able to lift away from its seating, lifting the piston 18, and allowing fuel to flow to the outlet openings 13. Fuel injection thus takes place. The distance through which the needle 12 can lift is limited by the piston 18 moving into engagement with a stop formed integrally with the piston housing 17.

[0024] Injection can be interrupted, if desired, by deenergising the actuator 28 to allow the valve member 23 to move into engagement with its seating, breaking the flow path between the control chamber 39 and the low pressure reservoir. As the control chamber 39 is in constant communication with the supply passage 37, the control chamber pressure rises, increasing the magnitude of the downward force applied to the needle 12, and a point will be reached beyond which the needle 12 returns into engagement with its seating. Injection can be restored by reenergising the actuator 28 and terminated by, again, deenergising the actuator 28. It will be appreciated that, in this manner, the injector can be used to supply a pilot fuel injection or a post-injection followed or preceded respectively by a main fuel injection, and this is advantageous in that noise and emissions levels can be reduced.

[0025] On terminating injection at the end of an injection cycle, the spill valve 41 is conveniently opened to relieve the fuel pressure within the pumping chamber 36. At about the same time as the spill valve 41 is opened, and preferably just before, the control valve 24 is closed. This has the result that the forces acting on the needle 12 urging the needle 12 away from the seating are reduced rapidly, assisting the fuel pressure within the control chamber 39 and giving rise to a rapid termination of injection. This is particularly advantageous where a main injection is to be terminated.

[0026] The injector described hereinbefore is advantageous in that it can be operated in a number of ways. For example, by appropriate control of the spill valve, the pressure can be maintained as substantially a desired level, and accurate control of the injection pressure can be achieved. Accurate control over the timing of fuel injection, at both the commencement and termination of injection, can also be achieved. Selection of the sizes of the restrictions to fuel flow defined by the inlet and outlet passages allows the responsiveness of the injector at both the commencement and termination of injection to be tuned, permitting initial injection rate

shaping.

[0027] Although the description hereinbefore is of a fuel injector of the type in which a pump and a nozzle are rigidly secured to one another, it will be appreciated that these integers could be spaced apart from one another, a suitable fuel pipe being used to transmit fuel under pressure from the pumping chamber of the pump to the nozzle. It will further be appreciated that movement of the valve member 23 need not be controlled by means of an electromagnetic actuator, but alternatively may be controlled by means of a piezoelectric actuator.

#### Claims

1. A fuel injector comprising a valve needle (12) slidable within a bore (11) formed in a nozzle (10) and engageable with a seating to control delivery of fuel from the bore (11) and a supply passage (37) for supplying fuel under high pressure to the bore (11), the needle (12) having associated therewith a surface exposed to fuel pressure within a control chamber (39), the control chamber (39) communicating, continuously, through an inlet passage (38) with the supply passage (37), the control chamber (39) further communicating, through an outlet passage (40), with an injection control valve (21-25) arranged to control communication between the control chamber (39) and a drain port, wherein the inlet and outlet passages (38 and 40) are shaped to restrict the rate at which fuel can flow to and from the control chamber (39).
2. A fuel injector as claimed in claim 1, wherein a fuel delivery chamber (15) connected with the supply passage (37) is provided in the nozzle (10), the needle (12) has at least one thrust surface exposed to pressure in the fuel delivery chamber (15) and arranged, in use, to urge the needle (12) away from the seating, and the surface exposed to fuel pressure within the control chamber (39) is arranged to act on the needle (12) in a direction tending to urge the needle (12) towards the seating.
3. A fuel injector as claimed in claim 2, wherein the surface exposed to fuel pressure within the control chamber (39) has a greater effective area than the effective area of said at least one thrust surface of the needle (12).
4. A fuel injector as claimed in claim 1, 2 or 3, wherein the surface associated with the needle (12) is defined by a surface of a piston (18) adapted to engage with the needle (12).
5. A fuel injector as claimed in any preceding claim, wherein an actuator (28) is provided for actuating the injection control valve (21-25).

6. A fuel injector as claimed in claim 5, wherein the actuator (28) is an electromagnetic actuator.
7. A fuel injector as claimed in claim 5, wherein the actuator is a piezoelectric actuator. 5
8. A fuel injector as claimed in claim 7, comprising a pressurisation control valve (41) for controlling communication between a pumping chamber (36) of a fuel pump associated with the injector and a 10 low pressure feed port.
9. A fuel actuator as claimed in claim 8, wherein the control valve (41) is arranged as a spill valve to allow fuel from the pumping chamber (36) to be 15 pumped back to the feed port when fuel delivery from the nozzle (12) is not required.

20

25

30


35

40

45

50

55

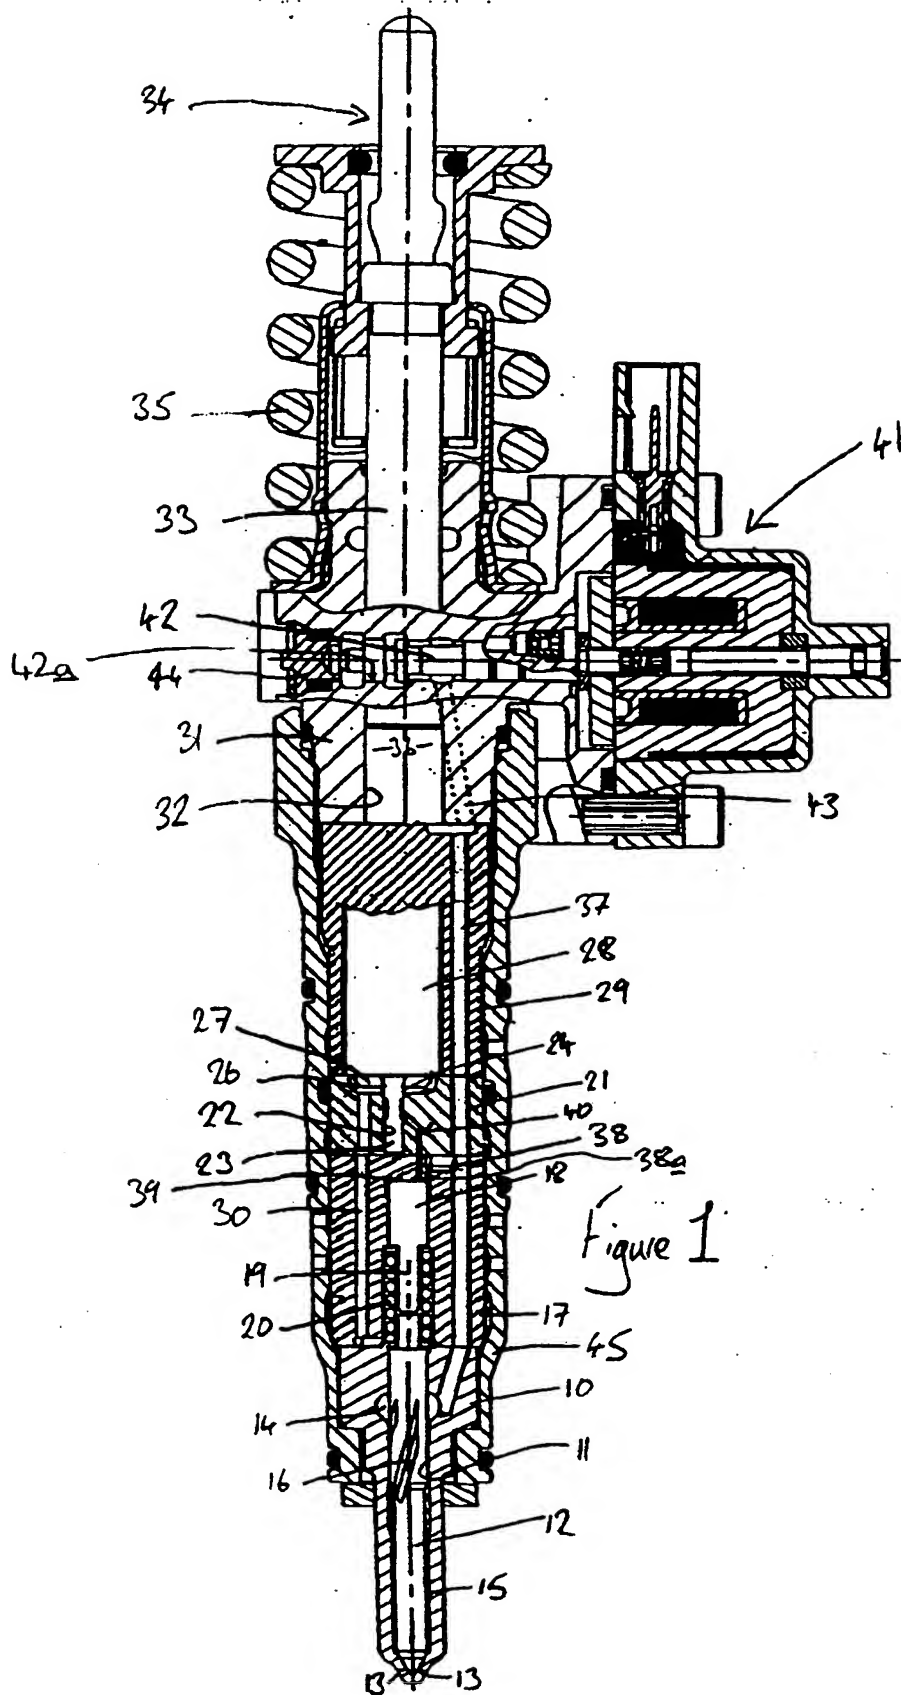

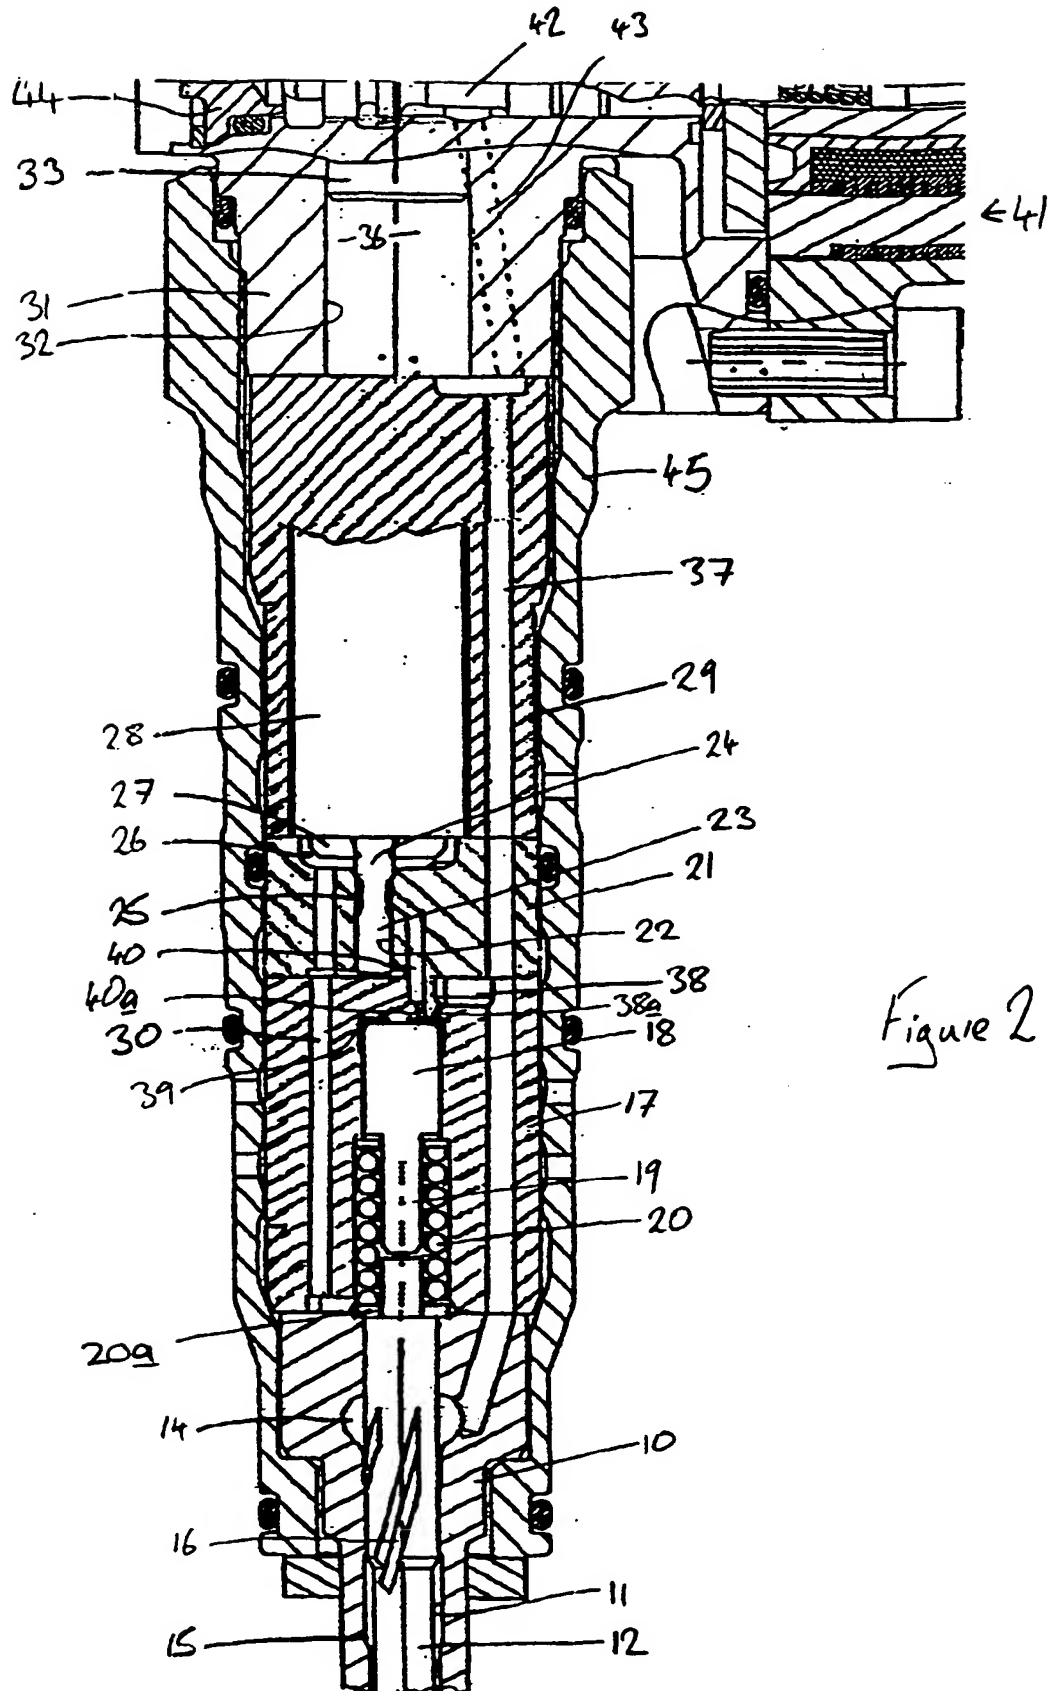


Figure 2

**THIS PAGE BLANK (USPTO)**



(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 065 368 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
31.07.2002 Bulletin 2002/31

(51) Int Cl.7: **F02M 57/02, F02M 45/02,  
F02M 47/02, F02M 59/36**

(43) Date of publication A2:  
03.01.2001 Bulletin 2001/01

(21) Application number: 00305414.5

(22) Date of filing: 28.06.2000

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Lambert, Malcolm David Dick**  
Bromley, Kent BR2 9LN (GB)  
• **Buckley, Paul**  
Gillingham, Kent ME8 9ES (GB)


(30) Priority: 30.06.1999 GB 9915118

(74) Representative: **Pople, Joanne Selina**  
**Marks & Clerk,**  
**Alpha Tower,**  
**Suffolk Street,**  
**Queensway**  
**Birmingham B1 1TT (GB)**

(71) Applicant: **Delphi Technologies, Inc.**  
Troy, MI 48007 (US)

### (54) Fuel injector

(57) A fuel injector has a valve needle (12) slidable within a bore (11) formed in a nozzle (10). The valve needle (12) is engageable with a seating to control delivery of fuel from the bore (11). The injector also includes a supply passage (37) for supplying fuel under high pressure to the bore (11). A surface of a piston (18) adapted to engage with the needle (12) is exposed to the fuel pressure within a control chamber (39) which communicates continuously through an inlet passage (38) with the supply passage (37). The control chamber (39) further communicates, through an outlet passage (40), with an injection control valve (21-25) arranged to control communication between the control chamber (39) and a drain port. The inlet and outlet passages (38 and 40) are shaped to restrict the rate at which fuel can flow to and from the control chamber (39).

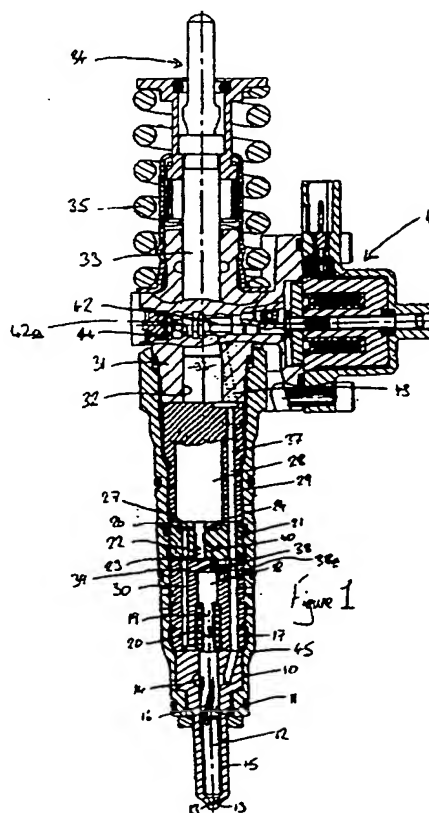



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 5414

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 875 764 A (KAPPEL ANDREAS ET AL) 2 March 1999 (1999-03-02) * column 2, line 21-25 * * column 7, line 48-50 * * column 9, line 8,21,22,26-31,67; figures 1,2 *	1-5,7	F02M57/02 F02M45/02 F02M47/02 F02M59/36
X	US 5 551 634 A (AUGUSTIN ULRICH ET AL) 3 September 1996 (1996-09-03) * column 2, line 14-18,30-33,57-59 * * column 3, line 5-9,23-29; figure 1 *	1-6	
X	US 5 551 398 A (SHINOGLA RONALD D ET AL) 3 September 1996 (1996-09-03) * column 2, line 3-8,12-19 * * column 4, line 27-41,44 * * column 4, line 52-55,61,62 * * column 5, line 40-44,50-54,65-67; figures 3,5 *	1-9	
X	US 5 230 613 A (HILSBOS RICHARD L ET AL) 27 July 1993 (1993-07-27) * column 6, line 45-47,51; figures 1,5 *	1-6	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
X	DE 198 26 107 A (AVL LIST GMBH) 17 December 1998 (1998-12-17) * column 1, line 3-21 * * column 2, line 25-27; figure 1 *	1-8	F02M
X	EP 0 905 719 A (LUCAS IND PLC ;CATERPILLAR INC (US)) 31 March 1999 (1999-03-31) * column 1, line 18-21 * * column 2, line 54-59 * * column 3, line 1-4,31-34 * * column 4, line 3-6,13-15; figure 1 *	1-6,8,9	
-/--			
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>7 June 2002</b>	Examiner <b>Boye, M</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 5414

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D, A	EP 0 840 003 A (LUCAS IND PLC ;CATERPILLAR INC (US)) 6 May 1998 (1998-05-06) * abstract; figure 1 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>7 June 2002</b>	Examiner <b>Boye, M</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 5414

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-06-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5875764	A	02-03-1999	WO	9958840 A1	18-11-1999
US 5551634	A	03-09-1996	DE	4340305 A1	01-06-1995
			FR	2712933 A1	02-06-1995
			GB	2284236 A ,B	31-05-1995
			IT	RM940729 A1	26-05-1995
US 5551398	A	03-09-1996	CA	2145709 A1	14-11-1995
			DE	19517578 A1	16-11-1995
			GB	2289313 A ,B	15-11-1995
			GB	2320288 A ,B	17-06-1998
			GB	2320289 A ,B	17-06-1998
			GB	2320290 A ,B	17-06-1998
			GB	2320291 A ,B	17-06-1998
			GB	2320292 A ,B	17-06-1998
			JP	7310623 A	28-11-1995
			US	5628293 A	13-05-1997
US 5230613	A	27-07-1993	US	5133645 A	28-07-1992
			DE	4233273 A1	02-09-1993
			GB	2263317 A ,B	21-07-1993
			JP	2651432 B2	10-09-1997
			JP	5272435 A	19-10-1993
			DE	4115103 A1	02-04-1992
			GB	2246175 A ,B	22-01-1992
DE 19826107	A	17-12-1998	AT	2110 U2	27-04-1998
			DE	19826107 A1	17-12-1998
EP 0905719	A	31-03-1999	EP	0905719 A2	31-03-1999
			JP	11153246 A	08-06-1999
EP 0840003	A	06-05-1998	EP	0840003 A1	06-05-1998
			JP	10148167 A	02-06-1998
			US	5915623 A	29-06-1999

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**